


Patriot –M7X




LA (Load Application) temperature control System for LEAD-FREE

- Indicate setting & real temperature
- Fast recover the temperature
- PID temperature control system
- Long life for TIP & HEATER



LA



Non LA

<Specification>

Input	AC 100 ~ 220, 50/60Hz	Heater	AC 100 or 220, 40W or 65W
Temp Range	0~500° C	TIP	BN Type TIP
Control	PID + SSR		
Dimension (mm)	97 (W) x 73 (H) x 130 (D)		
Weight	840g		

SOLDERING WIRE V-CUT UNIT

BK-7200



Flux or solder ball scattering protection UNIT

- Protect the solder ball by V-solder
- Easy change the pulley


<Specification>

Input	AC 100 ~ 220V, 50 / 60Hz
Solder wire	Ø 0.6 ~ Ø 1.6
Signal	Foot Switch
Speed	40 ~ 45mm
Dimension (mm)	110 (W) x 160 (D) x 165 (H)
Weight	2kg



[Cutting Face]

» Process

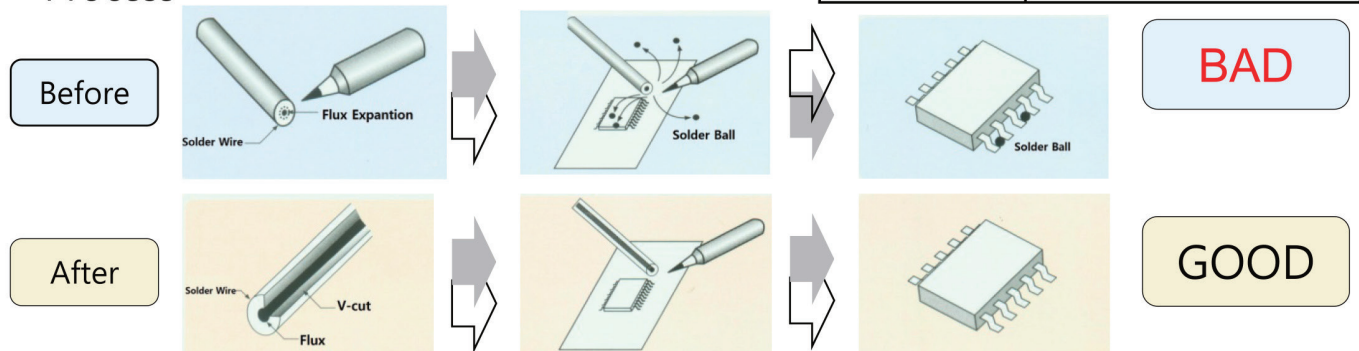

CONTACT



AUTOMATION, SMT & LEAN MANUFACTURING

www.ams-fa.com

U S A

10030 Via de la Amistad, San Diego, CA 92154

Call: (619) 661.5985

Email: ams@ams-fa.com

B R A Z I L

Rua Laerte de Paiva, 344 Bairro Macuco
Valinhos-SP-CEP 13279.451

Call: +55 (19) 3849.5555

Email: quote@ams-fa.com